



28 INCH CONE

(MINIMUM SIZE CONE FOR ALL CLASSES OF
ROADS EXCEPT FREEWAYS AND EXPRESSWAYS)

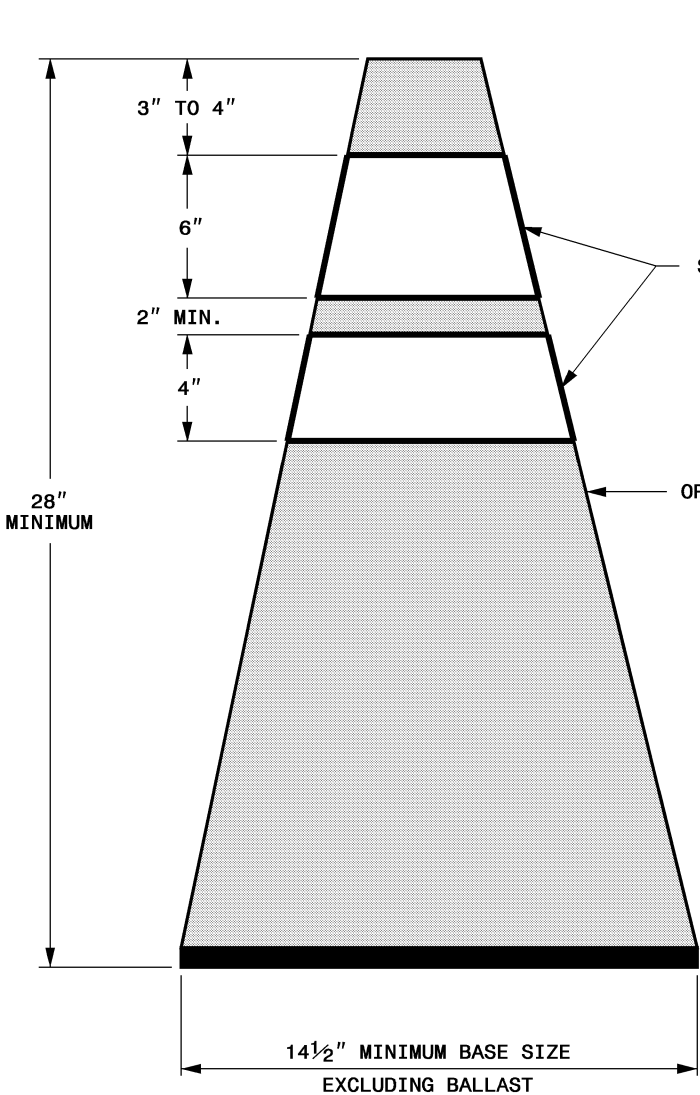

36 INCH CONE

(REQUIRED FOR FREEWAYS AND EXPRESSWAYS)

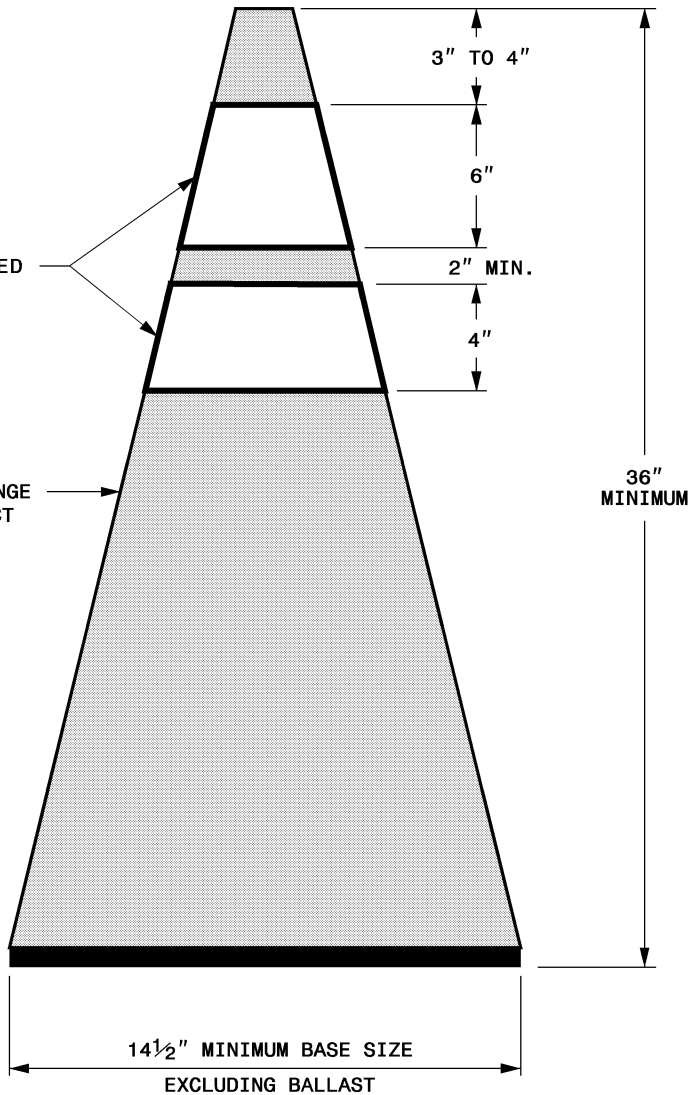

GENERAL NOTES

1-ACHIEVE BALLASTING BY USING SPECIAL WEIGHTED BASES SUCH AS SAND BAG RINGS, DOUBLING CONES, OR BASES THAT CAN BE FILLED WITH BALLAST. SEVENTY PERCENT OF THE WEIGHT OF THE CONE MUST BE IN THE BASE. USE BALLASTS THAT DO NOT PRESENT A HAZARD WHEN STRUCK.